

www.studioefabrics.com

HOLLY JOLLY

Runner



Featuring fabrics from the Holly Jolly collection by Jennifer Brinley for

Fahric Requirements

I usi ici ici un chichis			
(A) 3000-88	2 ¹ / ₈ yards	s (G) 3004-99	½ yard
(B) 3003-99	⅔ yard*	Backing	
(C) 1351-Burgundy	⅓ yard**	3001-88	2 ¼ yards
(D) 1351-Pigment White	3⁄4 yard**		
(E) 3003-66		* Includes Binding	
(F) 3002-99	½ yard	** Just Color! Collection	

Additional Supplies Needed

Batting 78" x 42" Piecing and sewing thread Quilting and sewing supplies

Runner design by Heidi Pridemore Finished Quilt Size 70" x 34"

Cutting

Cutting Instructions

Please note: all strips are cut across the width of fabric (WOF) from selvage to selvage edge.

WOF= Width of Fabric • LOF = Length of Fabric

Fabric A (3000-88 Large Medallion Border – Red), cut:

- (2) 4" x 71" LOF strips.
- (2) 4" x 35 LOF strips.
- Fussy cut (12) 6 ¹/₂" squares from the remaining fabric

Fabric B (3003-99 Dots – Black), cut:

- (3) 3 ¹/₂" x WOF strips, sub-cut (48) 2" x 3 ¹/₂" strips.
- (6) 2 ¹/₂" x WOF strips for the binding.

Fabric C (1351-Burgundy Just Color! – Burgundy), cut:

• (3) 2 ³/₈" x WOF strips, sub-cut (48) 2 ³/₈" squares.

Fabric D (1351-Pigment White Just Color! - Pigment White), cut:

- (7) 2" x WOF strips, sub-cut (144) 2" squares.
- (3) 2 ³/₈" x WOF strips, sub-cut (48) 2 ³/₈" squares.

Fabric E (3003-66 Dots – Green), cut:

- (3) 1 ½" x WOF strips. Sew the strips together, end to end with diagonal seams, and cut (2) 1 ½" x 56 ½" strips.
- (1) 1 ¹/₂" x WOF strip, sub-cut (2) 1 ¹/₂" x 18 ¹/₂" strips.

Fabric F (3002-99 Holly – Black), cut:

• (5) 2 ½" x WOF strips. Sew the strips together, end to end with diagonal seams, and cut (2) 2 ½" x 60 ½" strips and (2) 2 ½" x 20 ½" strips.

Fabric G (3004-99 Stripe – Black), cut:

- (2) 2" x 31 ½" WOF strips.
- (4) 2" x WOF strips. Sew the strips together, end to end with diagonal seams, and cut (2) 2" x 70 ½" strips.

Backing (3001-88 Medallion – Red), cut:


• (1) 78" x 42" strip for the back.

Sewing

Sew using a ¼" seam allowance with right sides together (RST) unless otherwise indicated. Always press towards the darker fabric while assembling, unless otherwise noted by the arrows.

Block Assembly

1. Place (1) 2 ³/₈" Fabric D square on top of (1) 2 ³/₈" Fabric C square, right sides together. Draw a line across the diagonal of the top square (Fig. 1). Sew ¼" away from each side of the drawn diagonal line (Fig. 1). Cut the two squares apart on the drawn diagonal line (Fig. 2) to make (2) CD units (Fig. 3). Trim the CD units to measure 2" square. Repeat to make (96) CD units total.



2. Place (1) 2" Fabric D square on the left side of (1) 2" x 3 ½" Fabric B strip, right sides together (Fig. 4). Sew across the diagonal of the square from the upper right corner to the lower left corner (Fig. 4). Flip open the triangle formed and press (Fig. 5). Trim away the excess fabric from behind the triangle, leaving a ¹/₄" seam allowance.





Fig. 5

3. Place another 2" Fabric D square on the right side of the 2" x 3 ¹/₂" Fabric B strip, right sides together (Fig. 6). Sew across the diagonal of the square from the upper left corner to the lower right corner (Fig. 6). Flip open the triangle formed and press (Fig. 7). Trim away the excess fabric from behind the triangle, leaving a ¹/₄" seam allowance to make (1) DBD unit.





4. Repeat Steps 2-3 to make (48) DBD units total.

5. Sew (1) CD unit to each end of (1) DBD unit to make (1) side strip. Repeat to make (48) side strips total. Sew (1) side strip to each side of (1) $6\frac{1}{2}$ " Fabric A square. Sew (1) 2" Fabric D square to each end of (1) side strip. Repeat to make a second strip. Sew the strips to the top and to the bottom of the Fabric A square to make (1) Block (Fig. 8). Repeat to make (12) Blocks total.






Fig. 8

Quilt Top Assembly


6. Sew (6) Blocks together to make (1) row. Repeat to make a second row. Sew the rows together, lengthwise, to make the runner top (Fig. 9).

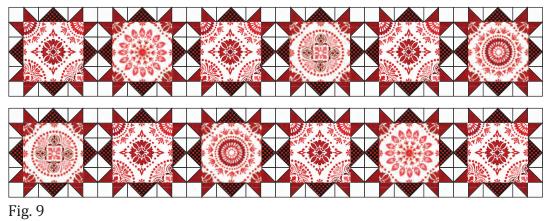

7. Sew (1) 1 ½" x 18 ½" Fabric E strip to each side of the runner top. Sew (1) 1 ½" x 56 ½" Fabric E strip to the top and to the bottom of the runner top (Fig. 10).

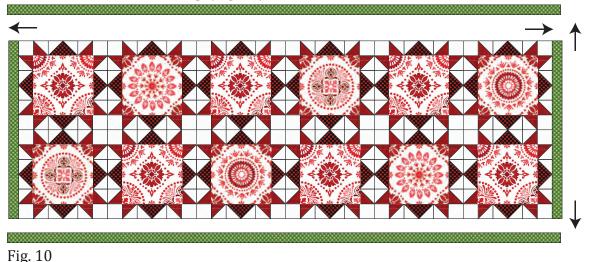

8. Sew (1) 2 ½" x 20 ½" Fabric F to each side of the runner top. Sew (1) 2 ½" x 60 ½" Fabric F strip to the top and to the bottom of the runner top (Fig. 11).

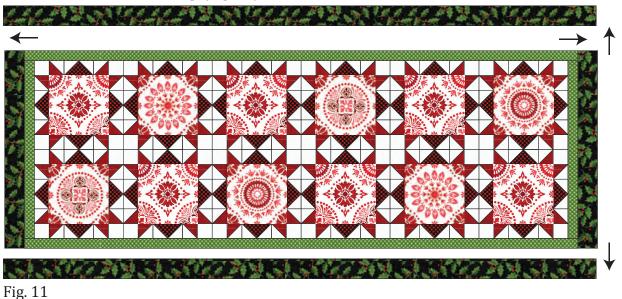

9. Center (1) 4" x 35" Fabric A strip on one side of the runner top and pin in place. Start sewing the strip a ¼" from the top edge of the runner top and stop a ¼" from the bottom edge. **DO NOT TRIM THE EXCESS.** Repeat with the opposite side.

10. Repeat Step 9 to sew (1) 4" x 71" Fabric A strip to the top and to the bottom of the runner top, making sure to stop and start $\frac{1}{4}$ " away from each end of the runner top. To miter each corner, fold the runner top on a diagonal, wrong side together. This should line up the strips from adjacent sides (Fig. 12).

Fig. 12

11. Starting at the sewn seam (represented by the arrow in Figure 12), draw a 45-degree line to the edge of the fabric. Sew on the drawn line. Trim the excess fabric leaving a $\frac{1}{4}$ " seam. Repeat this step with the remaining corners (Fig. 13).



Fig. 13

12. Sew (1) 2" x 31 ½" Fabric G strip to each side of the quilt top. Sew (1) 2" x 70 ½" Fabric G strip to the top and to the bottom of the quilt top (Fig. 14).



Layering, Quilting and Finishing

13. Press the quilt top and 78" x 42" backing well. Layer backing (wrong side up), batting, pressed quilt top (right side up) and baste. Quilt as desired and trim excess batting and backing when quilting is complete.

Binding

14. Cut the ends of the (6) Fabric B binding strips at a 45-degree angle and sew end to end to make (1) continuous piece of binding. Fold in half lengthwise and press wrong sides together.

15. Sew the binding to the front of the quilt, raw edges together. Turn the folded edge to the back, and hand stitch in place.